

LEGEND	
---	PROPERTY LINE
- - - - -	EXIST. CONTOUR
W	EXIST. WATER LINE
- O E -	EXIST. OVERHEAD UTILITY LINE
- T -	EXIST. TELE/COMM
000	PROP. CONTOUR
X	N: 0.00 E: 0.00 NORTHING/EASTING
— — — — —	CONCRETE SIDEWALK REF DTL: 1/C102
S	SILT FENCE REF DTL: 2/C102

- NOTES:**
- EXISTING TOPOGRAPHIC SURVEY AND LOCATION OF PHYSICAL FEATURES WERE OBTAINED FROM GIS INFORMATION AND CAD FILES PROVIDED BY THE OWNER. CONTRACTOR IS RESPONSIBLE FOR VERIFYING THE LOCATION OF ALL UNDERGROUND UTILITIES WITHIN THE AREA OF CONSTRUCTION.
 - CONTRACTOR TO VERIFY CLEARANCE OF OVERHEAD LINES. MINIMUM MUST BE 14 FEET. IF NOT, CONTRACTOR TO CONTACT UTILITY TO HAVE RAISED.
 - ALL EXISTING SIDEWALKS, CURBS, DRIVEWAYS, UTILITY APPURTENANCES, ETC. SHALL BE PROTECTED FROM DAMAGE OR RESTORED TO ORIGINAL CONDITION AT THE CONTRACTOR'S EXPENSE UNLESS SPECIFICALLY INDICATED TO BE REMOVED.
 - CONTRACTOR TO ADJUST EROSION CONTROL AS REQUIRED FOR FIELD CONDITIONS TO MEET THE INTENT OF THE CONSTRUCTION DOCUMENTS AND SWPPP.
 - ALL SEDIMENT SPILLED, DROPPED, WASHED, OR TRACKED ONTO PUBLIC ROADWAY MUST BE REMOVED IMMEDIATELY BY THE CONTRACTOR.
 - ALL DISTURBED AREAS SHALL BE REVEGETATED WITH NATIVE GRASSES.
 - ELEVATIONS SHOWN ARE TO TOP OF SURFACE. CONTRACTOR WILL BE RESPONSIBLE FOR ESTABLISHING SUBGRADE ELEVATIONS FOR PAVEMENT AREAS.
 - ALL SIDEWALKS SHALL NOT EXCEED MORE THAN 2% CROSS SLOPE (IN THE DIRECTION OF SURFACE DRAINAGE) OR 5% RUNNING SLOPE EXCEPT AS NOTED.
 - EXPOSED SUBGRADE BENEATH PAVED AREAS SHALL BE PROOF ROLLED TO DETECT WEAK SOIL SUPPORT AREAS. THESE AREAS WILL BE REMOVED AND REPLACED WITH SITE EXCAVATED MATERIALS OR IMPORTED MATERIALS HAVING THE SAME PROPERTIES AS SITE MATERIALS.
 - POSITIVE DRAINAGE SHALL BE MAINTAINED ON ALL SURFACE AREAS WITHIN THE SCOPE OF THIS PROJECT. DRAINAGE SHALL BE DIRECTED AWAY FROM ALL BUILDING FOUNDATIONS. CONTRACTOR SHOULD TAKE PRECAUTIONS NOT TO ALLOW ANY PONDING OF WATER.

- BUILDING PAD NOTES PER GEOTECH:**
- FOR A DISTANCE OF 3' BEYOND THE PERIMETER OF THE STRUCTURE, REMOVE AT LEAST 36" OF THE DARK BROWN FAT CH CLAY AND REPLACE WITH COMPACTED SELECT FILL AS INDICATED BELOW.
 - PRIOR TO PLACEMENT OF THE SELECT FILL, SCARIFY, MOISTURE CONDITION AND COMPACT THE TOP 12" OF SUBGRADE TO 95% OF THE DRY DENSITY DETERMINED BY TEST METHOD TEX 114 E. HOLD MOISTURE CONTENT TO 1 TO 3% WET OF OPTIMUM.
 - AFTER MOISTURE CONDITIONING AND COMPACTING SUBGRADE, PLACE THE SELECT FILL. THE SELECT FILL SHOULD CONFORM TO REQUIREMENTS ON PAGES 8 AND 9 OF THE BALCONES GEOTECHNICAL REPORT.

09/30/2019

mwm
Design Group

305 East Huntland Drive
Suite 200
Austin, Texas 78752
p: 512.453.0767
f: 512.453.1734

TBAE FIRM REGISTRATION NO.: 1452
TBE FIRM REGISTRATION NO.: F-1416
TBE FIRM REGISTRATION NO.: 10063600

NO.	DATE	DESCRIPTION	BY

SITE PLAN


WILLIAMSON COUNTY SHERIFF'S OFFICE GUN RANGE
AMMUNITION BUILDING
8160 CHANDLER ROAD HUTTO, TEXAS 78634

PLOTTED: 9/30/2019
JOB NO: 704-06B


C101

— OF —


File: Y:\704-06B-Wilco_Site\CAD\Sheets\C101-SITEPLAN.dwg 24x36

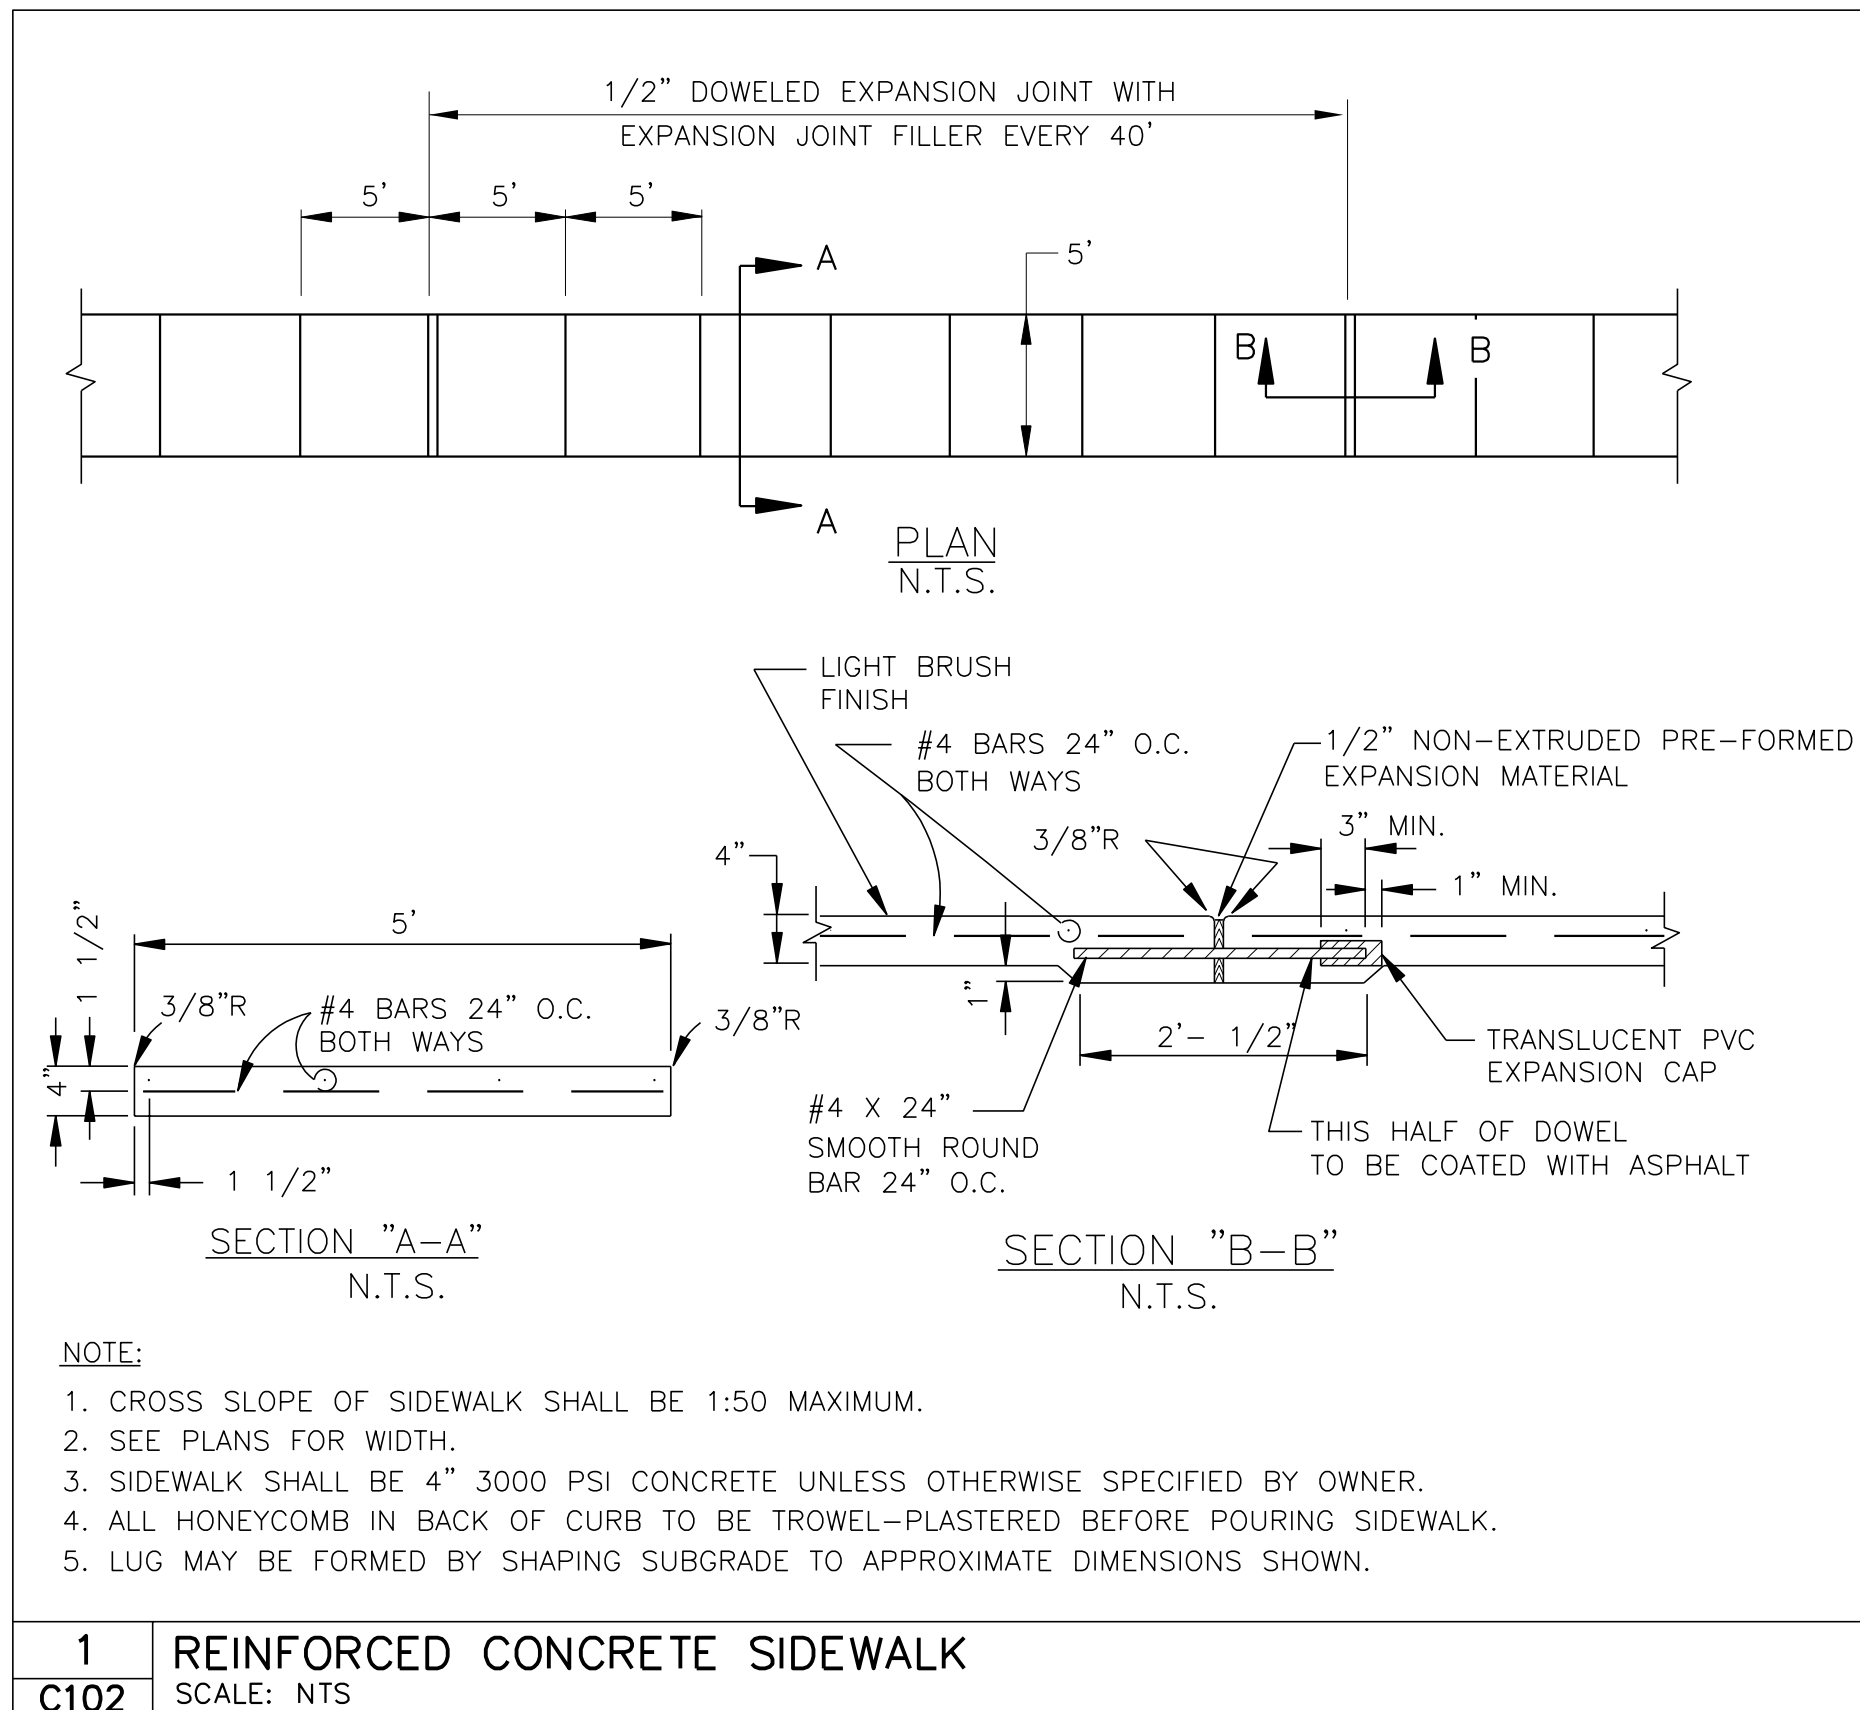

1 REINFORCED CONCRETE SIDEWALK
SCALE: NTS

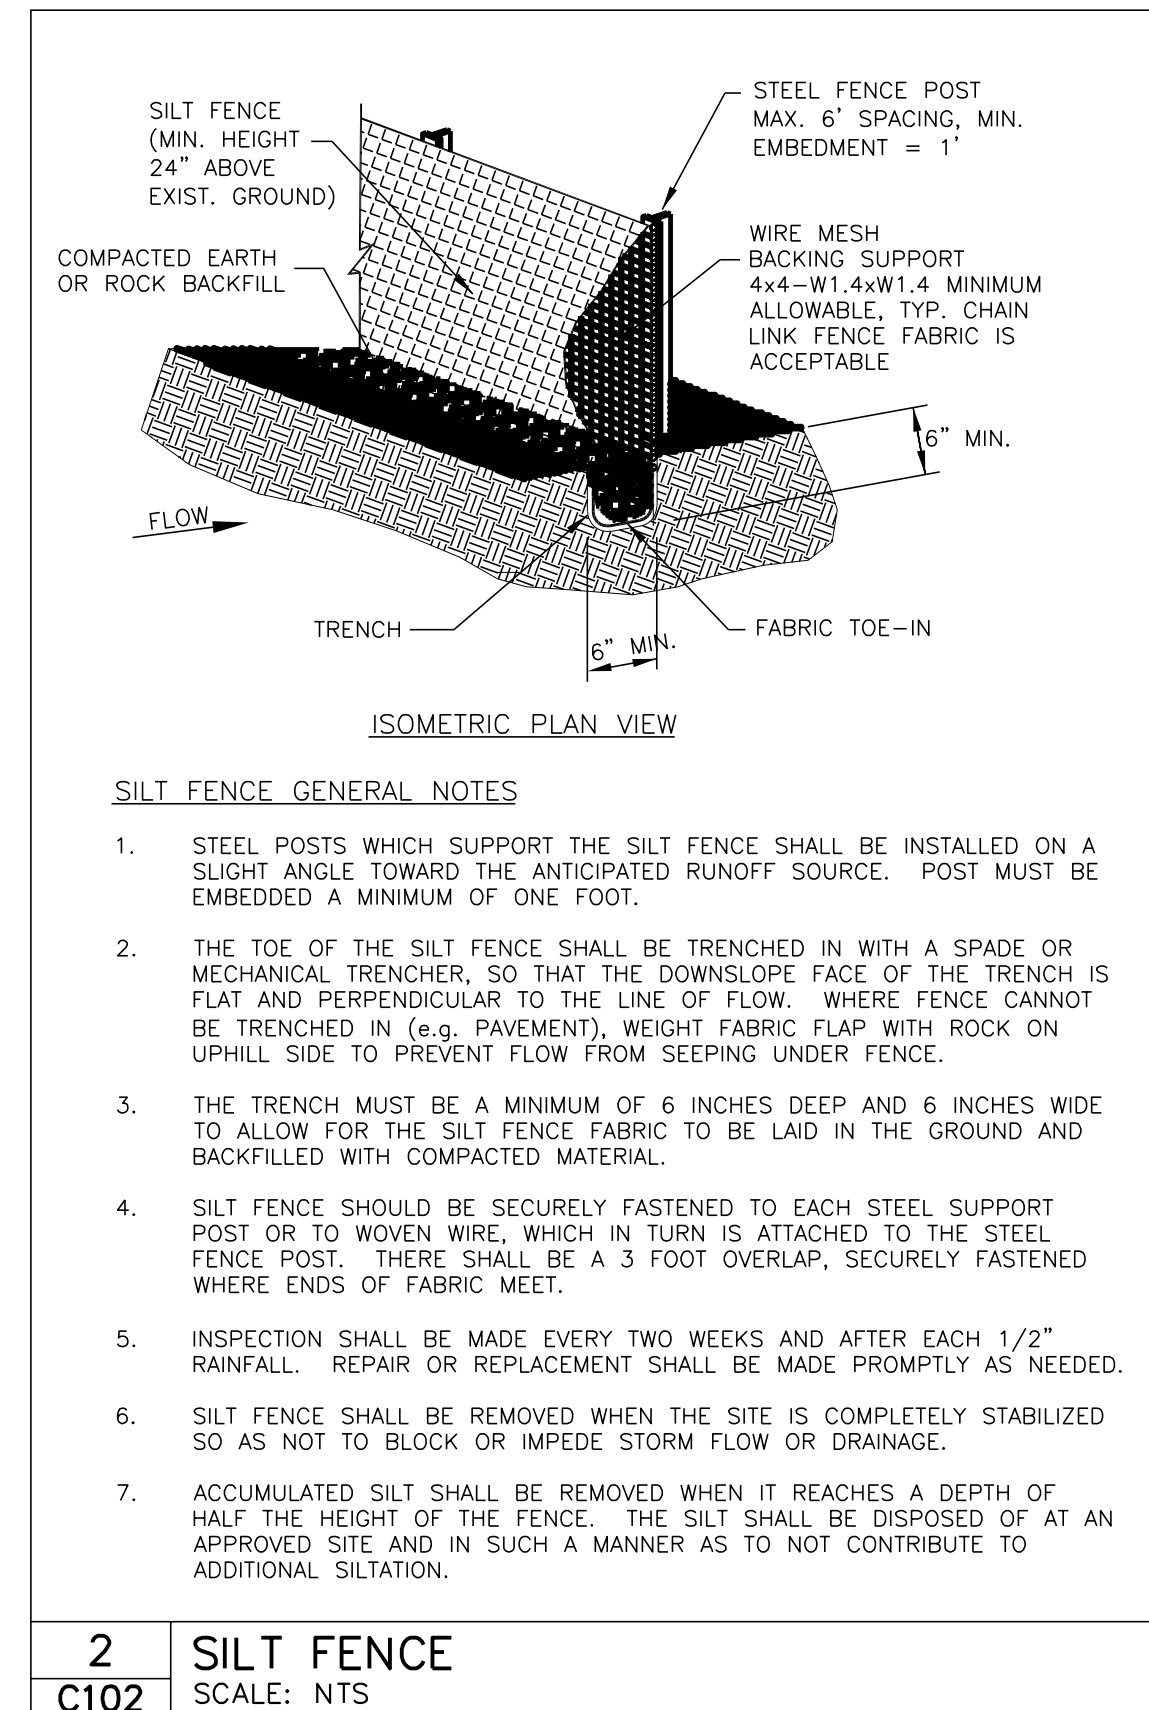

2 SILT FENCE
SCALE: NTS

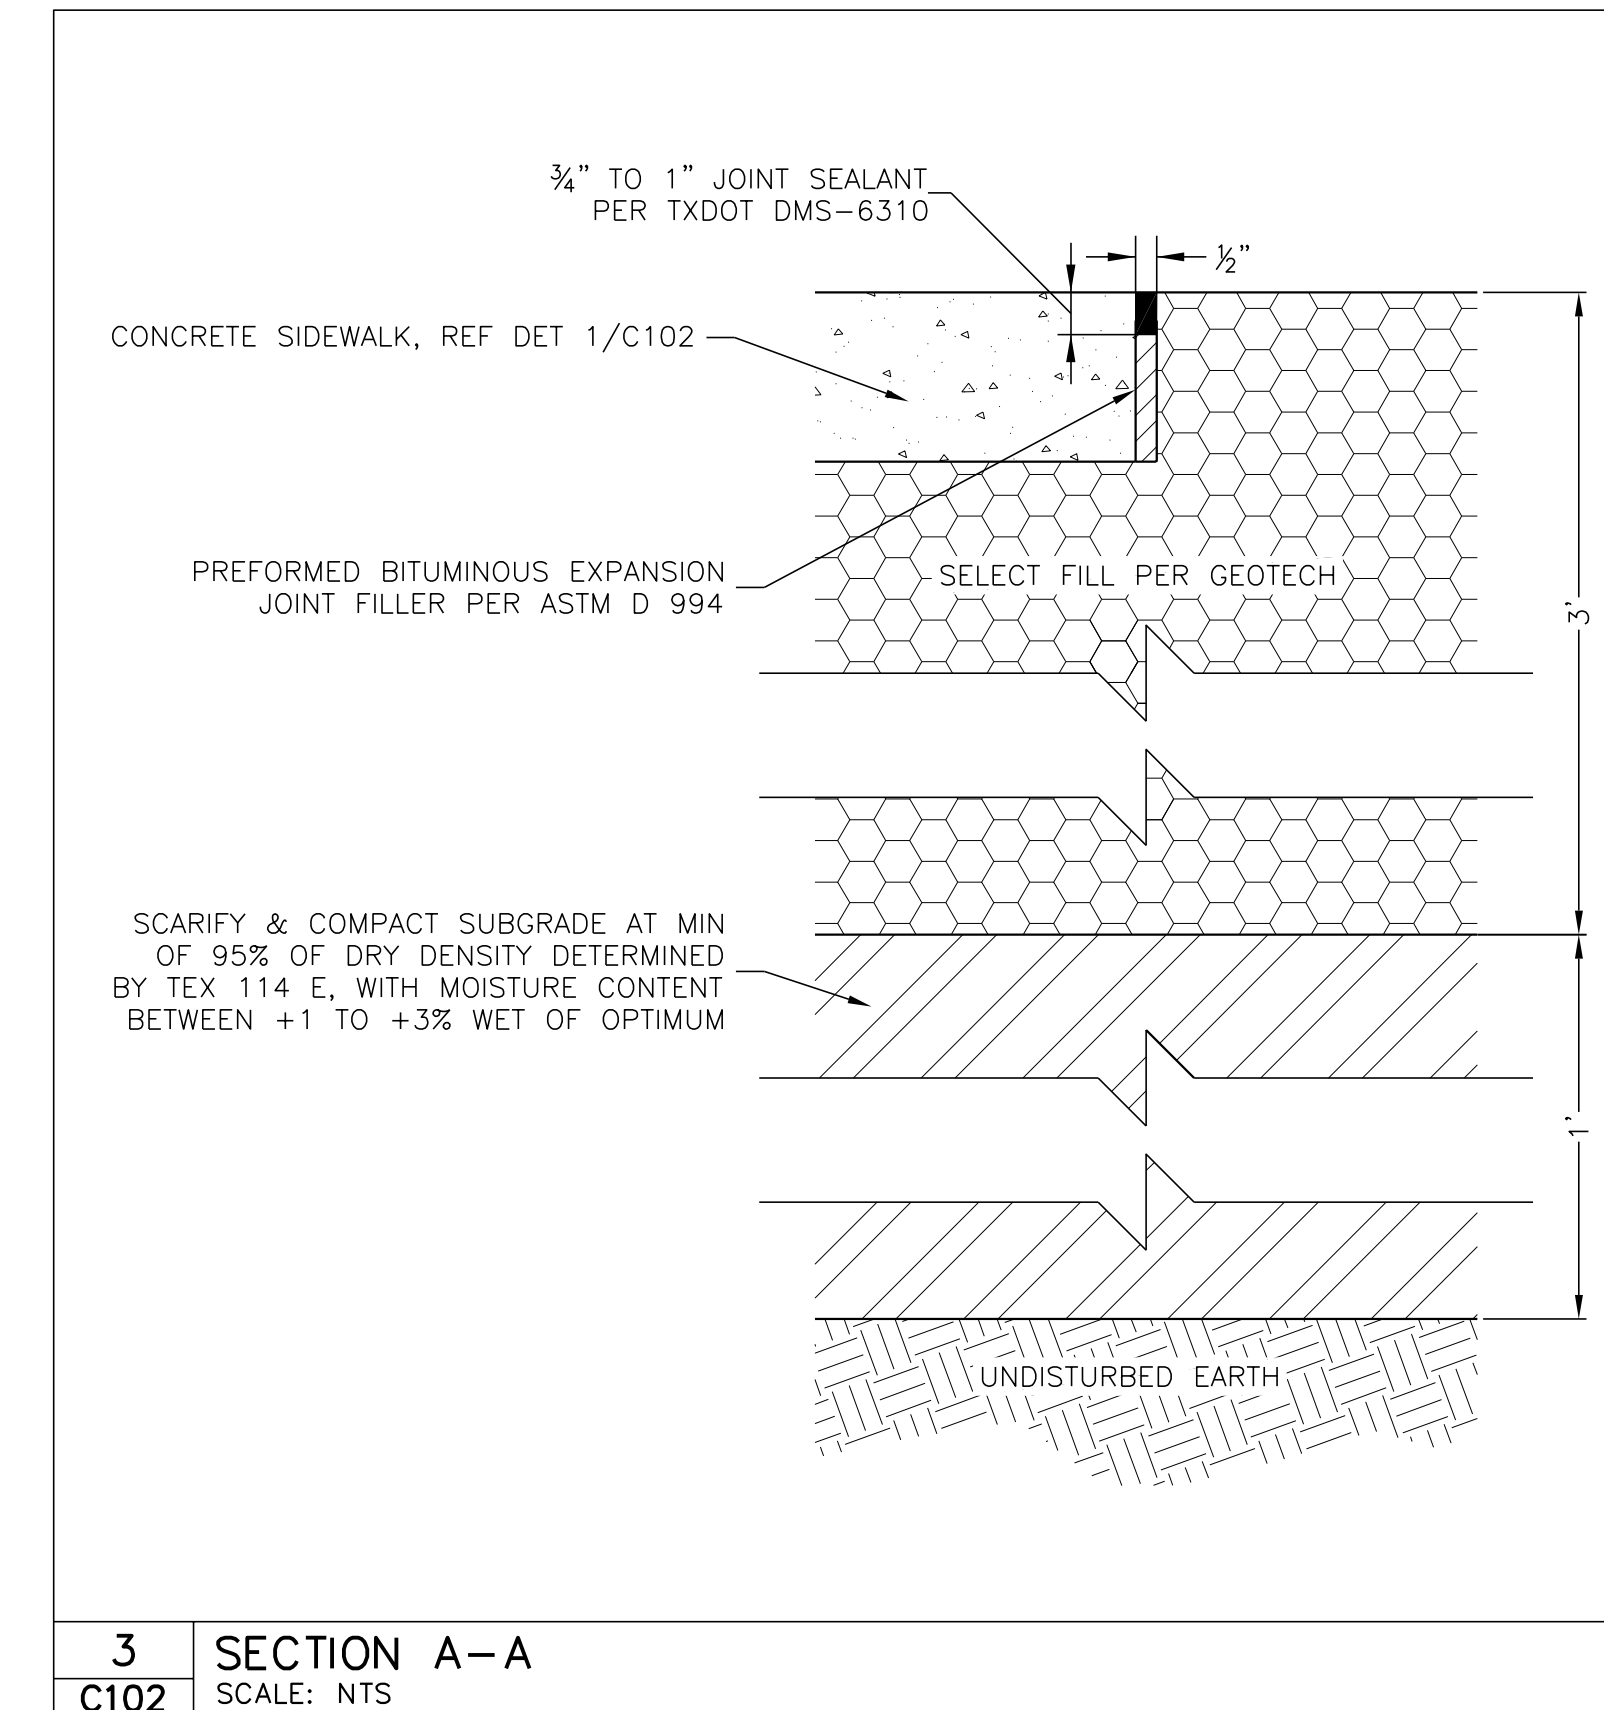

3 SECTION A-A
SCALE: NTS

09/18/2019

mwm
Design Group

305 East Huntland Drive
Suite 200
Austin, Texas 78752
p: 512.453.0767
f: 512.453.1734

TBAE FIRM REGISTRATION NO.: 1452
TBPE FIRM REGISTRATION NO.: F-1416
TBPLS FIRM REGISTRATION NO.: 10063600

NO.	DATE	DESCRIPTION	BY

0 1"

The bar above measures one inch on the original drawing. Adjust scales accordingly.

SITE DETAILS

WILLIAMSON COUNTY SHERIFF'S OFFICE GUN RANGE
AMMUNITION BUILDING
8160 CHANDLER ROAD HUTTO, TEXAS 78634

PLOTTED: 9/18/2019
JOB NO: 704-06B

C102
OF